


BAGEL BAGGER – MODEL BB19



DESIGNED FOR:

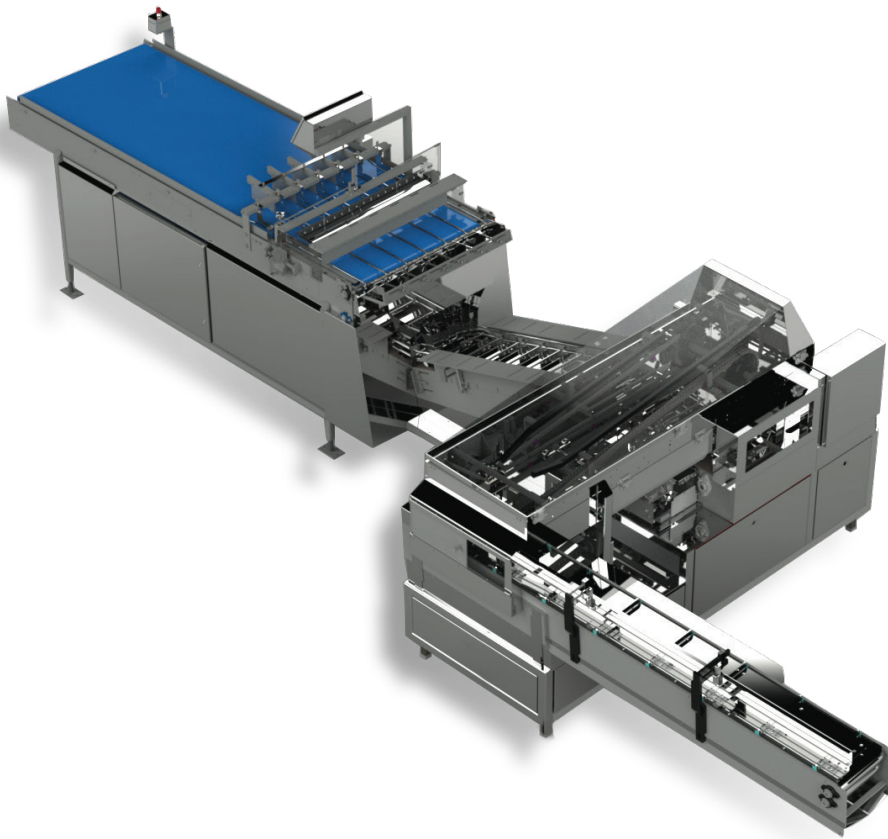


LMC's BB19 bagel bagger provides unmatched quality and reliability for our customers around the world. The ability to produce 60 bags per minute with superior laning, grouping, orientating, feeding, and bagging makes this the best complete line on the market.

The BB19 automatically puts the product on edge, adjusts easily to various-size packages, and controls the product through each packaging step.



TECHNICAL SPECIFICATIONS

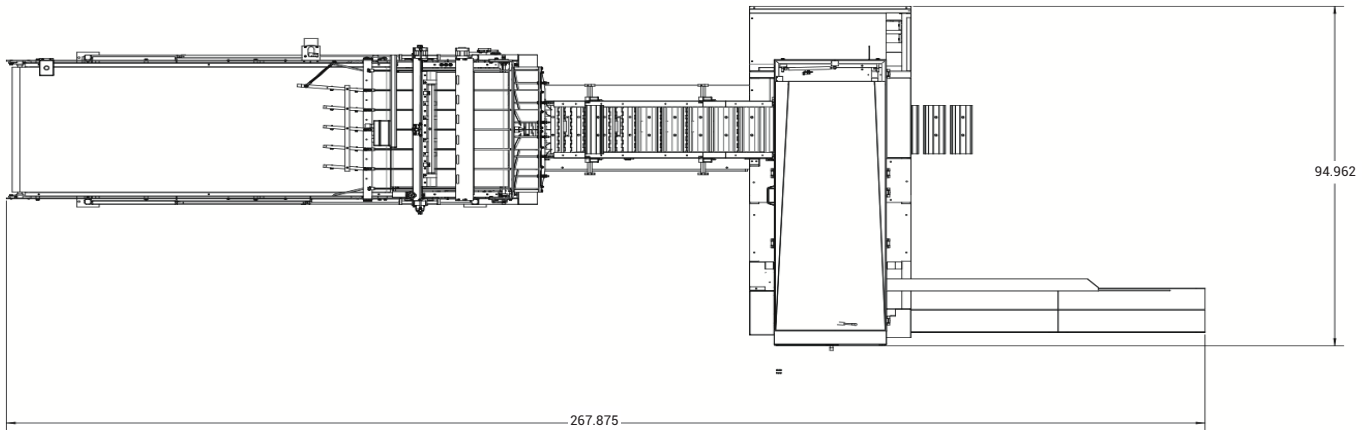

ELECTRICAL	208/230/460 VAC - 3Phase, 50/60Hz
SAFETY	Sensaguards prox switches, CAT 3
SPEED	25-60 packages per minute
AIR REQUIREMENTS	10 SCFM/90 psi/dry filtered air
DRIVE	1.5 HP
BAG REQUIREMENTS	300 bags per wicket with 3/8" diam



Specifications vary by product and application. Please contact our sales office about product varieties and speeds.



LMC builds the BB19 bagger for each customer's particular needs. Your machine may vary from this typical unit illustrated. LMC wants to meet with you and design your new line.

KEY FEATURES

- » The BB19 allows operators to hand load product off of a conveyor into separate flights
- » The flights move the product into the bagger area
- » Each flight of product is pushed into an inflated bag
- » The bagged product then moves onto the cross-feed conveyor and is ready for closing
- » Designed for penny stacker products (bagels, muffins, etc.)
- » Product Diameter: We can handle 3 & 1/2" D to 6" D products.
- » Package Length: With package length less than or equal to 16 inches.

OPTIONS

- » Automated bag table
- » CE Approval, guards and coded safety sensors
- » Magnetic door switches
- » UL Approval
- » CSA Approval



WATCH A VIDEO OF BB19

